



# Major League Electronics .100 cl Box Connector Socket Strip - Horizontal

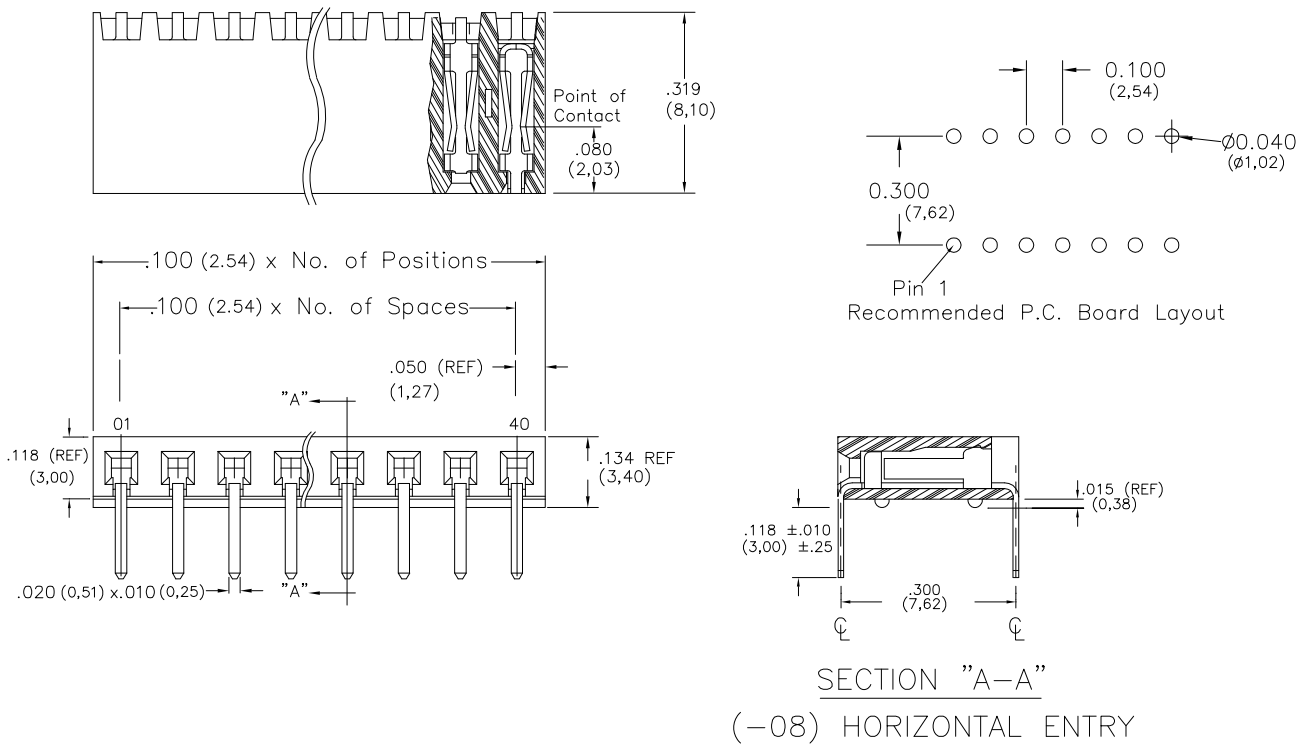

Tails may be clipped to achieve desired pin length

## Ordering Information

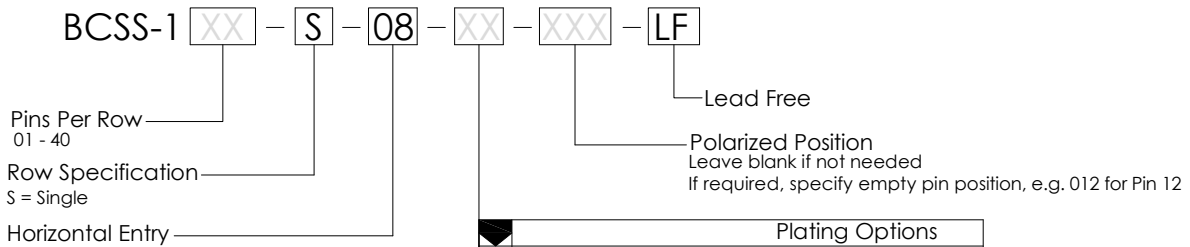


Plating Options	
H	- 30µ Gold on Contact Area / Matte Tin on Tail
T	- Matte Tin All Over
GT	- 10µ Gold on Contact Area / Matte Tin on Tail
F	- Gold Flash over Entire Pin
G	- 10µ Gold on Contact area / Flash on Tail

## Specifications

- Insertion Depth: .145 (3,68) to .250 (6,35)
- Insertion Force - Per Contact - H Plating: 5oz. (1,39N) avg with .025 (0,64mm) sq. pin
- Withdrawal Force - Per Contact - H Plating: 3oz. (0,83N) avg with .025 (0,64mm) sq. pin
- Current Rating: 3.0 Ampere
- Insulation Resistance: 5000MΩ Min.
- Dielectric Withstanding: 500V AC
- Contact Resistance: 20 mΩ Max.
- Operating Temperature: -40°C to + 105°C
- Max. Process Temperature:
  - Peak: 260°C up to 20 secs.
  - Process: 230°C up to 60 secs.
  - Wave: 260°C up to 6 secs.
  - Manual Solder: 350°C up to 5 secs.

## Materials

- Contact Material: Phosphor Bronze
- Insulator Material: Nylon 6T
- Plating: Au or Sn over 50µ" (1,27) Ni



## Mates with:

- BSTC, TSHCR,
- BSTCM, TSHCRE,
- BSTCR, TSHCRSM,
- BSTCRSM, TSHR,
- BSTS, TSHRE,
- LBSTCM, TSHS,
- LTSHCR, TSHSCM,
- LTSHCRE, TSHSM,
- LTSHR, ULTSHSM,
- LTSHRE, ULTSHC,
- LTSHSM, ULTSHCR
- TSHC,

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice

BCSS-1-SH SERIES

.100 cl Single Row  
Box Connector Socket Strip - Horizontal

12 JAN 07

Scale  
NTS

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS IN INCHES (MM)  
TOLERANCES ARE:

ONE PLACE DECIMALS ±.100  
TWO PLACE DECIMALS ±.010  
THREE PLACE DECIMALS ±.005  
FOUR PLACE DECIMALS ±.0020

ANGLES  
±.5°



4235 Earnings Way, New Albany, Indiana, 47150, USA  
1-800-782-3486 (USA/Canada/Mexico)  
Tel: 812-944-7244  
Fax: 812-944-7268  
E-mail: mle@mlelectronics.com  
Web: www.mlelectronics.com

Edition  
B

Sheet  
1/2

