

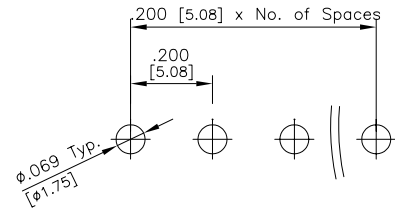
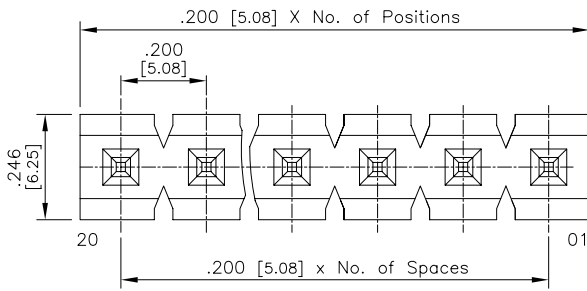


# Major League Electronics .200 cl Terminal Strip Header - Straight



RECOMMENDED PC BOARD LAYOUT

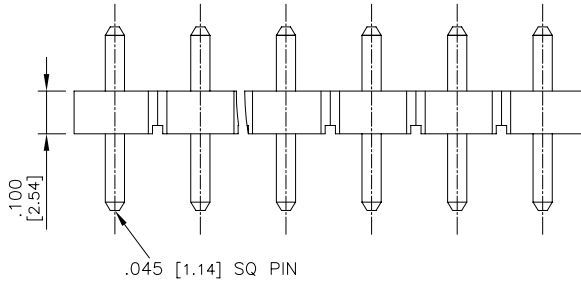

## Ordering Information

PC200H XX - S - XX - T - LF

Pins Per Row  
02 - 20

Row Specification  
S = Single Row

Lead Free

Plating Options	
T	Matte Tin All Over

Pin Options				
Post Length		Tail Length		
.150	3.81mm	.180	4.57mm	01
.470	11.94mm	.180	4.57mm	02
.520	13.21mm	.180	4.57mm	04
.829	21.06mm	.161	4.09mm	14

## Specifications

Current Rating: 7.9 Ampere

Insulation Resistance: 5000MΩ Min.

Dielectric Withstanding: 1500V AC/DC

Contact Resistance: 20 mΩ Max.

Operating Temperature: -55°C to + 125°C

Max. Process Temperature:

IR Reflow: 280°C up to 10 secs.

Wave: 250°C up to 10 secs.


Manual Solder: 380°C up to 5 secs.

## Materials

Contact Material: Brass

Insulator Material: LCP, UL94V-0

Plating: 120μ" Matte Tin over 50μ" (1,27) Ni

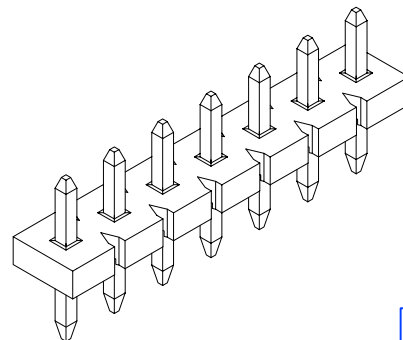

Mates With  
PC200S-XX-S-02  
PC200S-XX-S-04

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS IN INCHES (MM)  
TOLERANCES ARE:

NO PLACE DECIMALS ±0.30  
ONE PLACE DECIMALS ±0.20  
TWO PLACE DECIMALS ±0.15  
THREE PLACE DECIMALS ±0.10

### ANGLES

NO PLACE DECIMALS ±1.5°  
ONE PLACE DECIMALS ±1.0°  
TWO PLACE DECIMALS ±0.5°  
THREE PLACE DECIMALS ±0.3°

PC200H SERIES

.200cl Single Row - Straight  
Thru Hole Terminal Strip Header

23 JUN 08

Scale  
NTS



4235 Earnings Way, New Albany, Indiana, 47150, USA  
1-800-782-3486 (USA/Canada/Mexico)

Tel: 812-944-7244

Fax: 812-944-7268

E-mail: [mle@mlelectronics.com](mailto:mle@mlelectronics.com)

Web: [www.mlelectronics.com](http://www.mlelectronics.com)

Edition  
1

Sheet  
1/1