

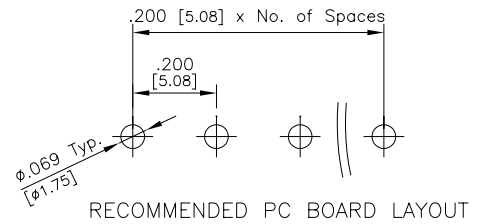


Major League Electronics .200 cl Terminal Strip Header - Right Angle

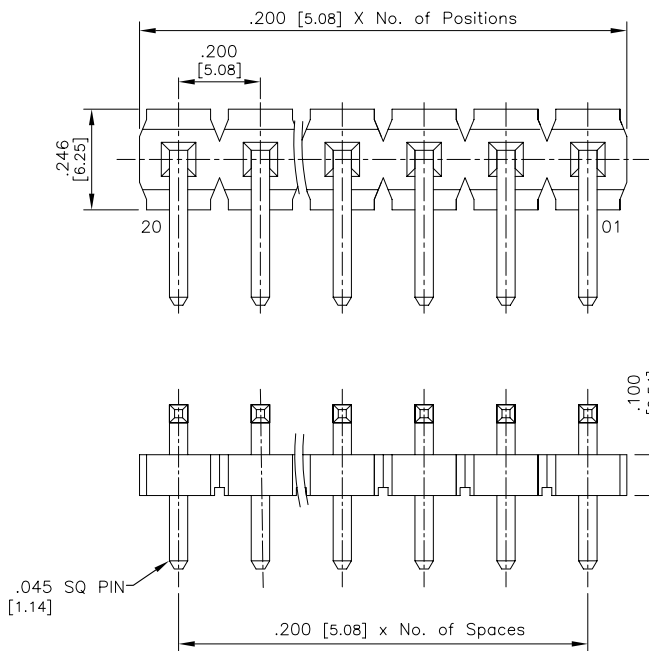

Tails may be clipped to achieve desired pin length

Ordering Information

PC200HR - S - - T - LF

Pins Per Row
02 - 20

Row Specification
S = Single Row

Lead Free

Plating Options	
T	Matte Tin All Over

Pin Options						
Post Length		Tail Length		R Dimension		
.318	8.08mm	.180	4.57mm	.100	2.54mm	06
.544	13.82mm	.156	3.96mm	.195	4.95mm	14

Specifications

Current Rating: 7.9 Ampere

Insulation Resistance: 5000M Ω Min.

Dielectric Withstanding: 1500V AC/DC

Contact Resistance: 20 m Ω Max.

Operating Temperature: -55°C to + 125°C

Max. Process Temperature:

IR Reflow: 280°C up to 10 secs.

Wave: 250°C up to 10 secs.


Manual Solder: 380°C up to 5 secs.

Materials

Contact Material: Brass

Insulator Material: LCP, UL94V-0

Plating: 120 μ " Matte Tin over 50 μ " (1,27) Ni

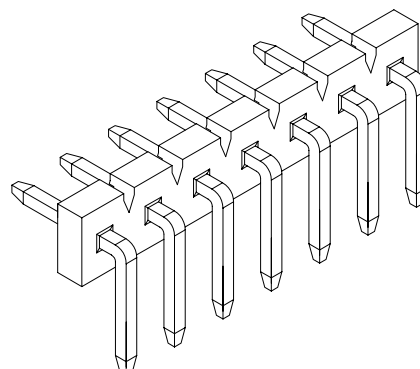

Mates with:
PC200S-XX-S-02
PC200S-XX-S-04

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice

UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES (MM)
TOLERANCES ARE:

ONE PLACE DECIMALS ± 0.38
TWO PLACE DECIMALS ± 0.25
THREE PLACE DECIMALS ± 0.13

ANGLES

NO PLACE DECIMALS $\pm 4.0'$
ONE PLACE DECIMALS $\pm 3.0'$
TWO PLACE DECIMALS $\pm 2.0'$
THREE PLACE DECIMALS $\pm 1.0'$

PC200HR SERIES

.200cl Single Row - Right Angle
Thru Hole Terminal Strip Header

23 JUN 08

Scale
NTS



4235 Earnings Way, New Albany, Indiana, 47150, USA
1-800-782-3486 (USA/Canada/Mexico)

Tel: 812-944-7244

Fax: 812-944-7268

E-mail: mle@mlelectronics.com

Web: www.mlelectronics.com

Edition
1

Sheet
1/1