



Major League Electronics .200 cl Surface Mount Socket Strip

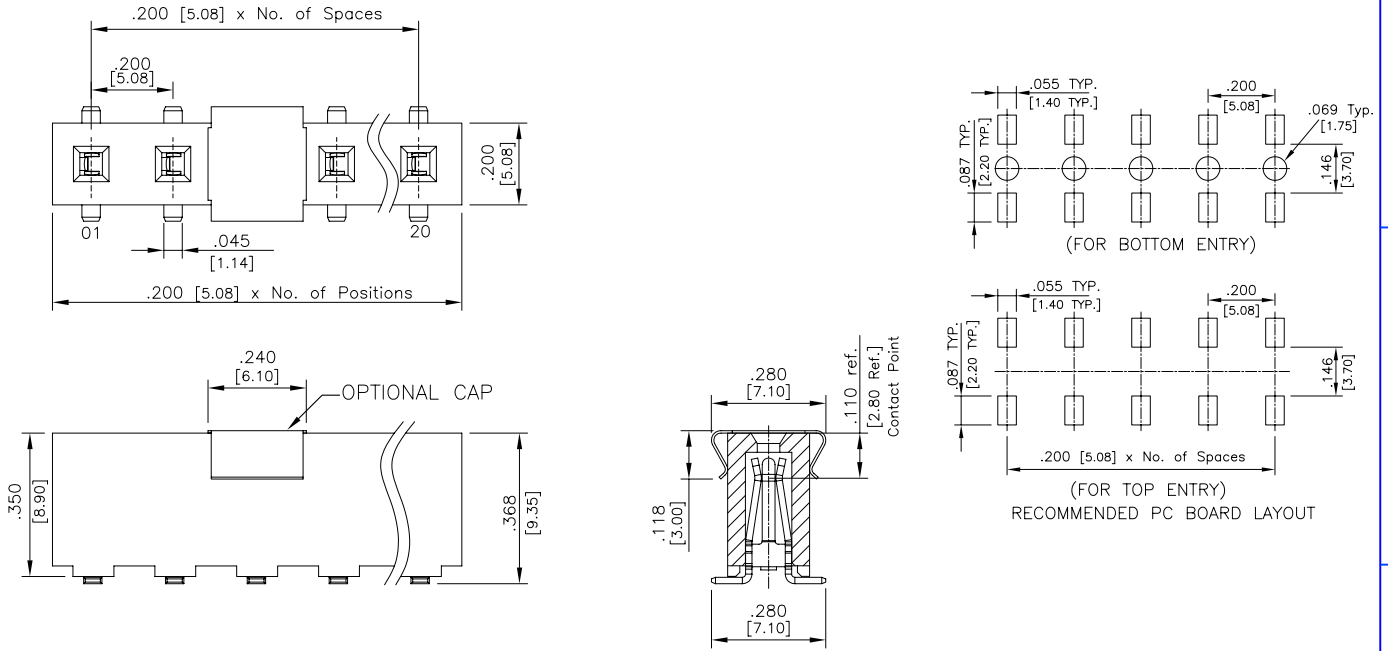

Ordering Information

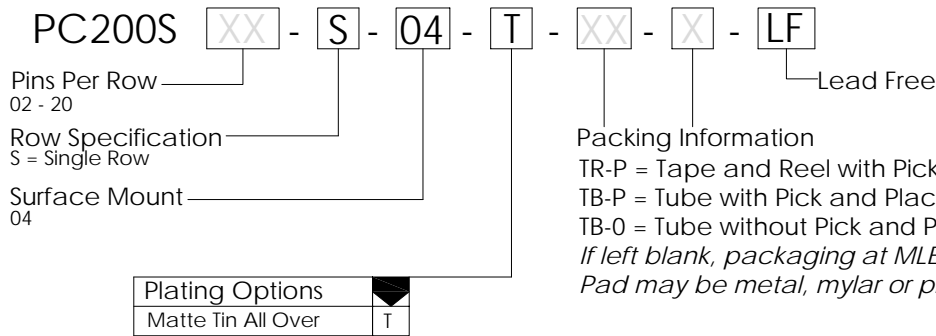


Specifications

Current Rating: 7.9 Ampere
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 1500V AC/DC
 Contact Resistance: 20 mΩ Max.
 Operating Temperature: -55°C to + 105°C
 Max. Process Temperature:
 IR Reflow: 280°C up to 10 secs.
 Wave: 250°C up to 10 secs.
 Manual Solder: 380°C up to 5 secs.

Materials

Contact Material: Phosphor Bronze
 Insulator Material: LCP, UL94V-0
 Plating: 100µ" Matte Tin over 50µ" (1,27) Ni

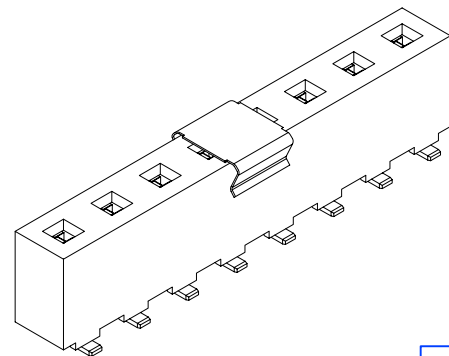

Mates with:
PC200H
PC200HR

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice

UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES (MM)
TOLERANCES ARE:

NO PLACE DECIMALS ±0.30
 ONE PLACE DECIMALS ±0.20
 TWO PLACE DECIMALS ±0.15
 THREE PLACE DECIMALS ±0.10

ANGLES
 NO PLACE DECIMALS ±5°
 ONE PLACE DECIMALS ±3°
 TWO PLACE DECIMALS ±1°
 THREE PLACE DECIMALS ±0.5°

PC200S-XX-S-04 SERIES

.200cl Single Row
Surface Mount Socket Strip

23 JUN 08

Scale
NTS



4235 Earnings Way, New Albany, Indiana, 47150, USA
 1-800-782-3486 (USA/Canada/Mexico)
 Tel: 812-944-7244
 Fax: 812-944-7268
 E-mail: mle@mlelectronics.com
 Web: www.mlelectronics.com

Edition
1

Sheet
1/1