


Major League Electronics .050x.050 cl Polarized Socket - Thru Hole

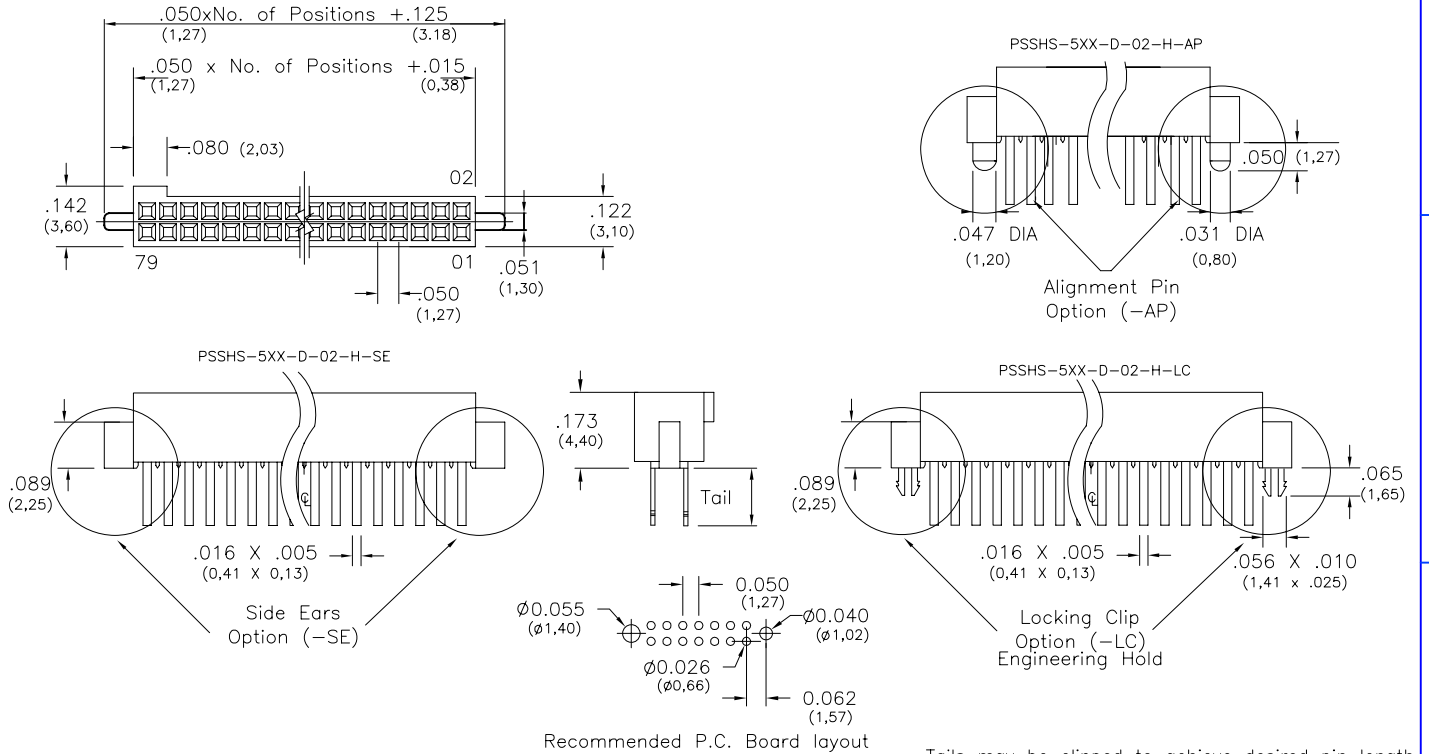

Ordering Information

PSSHS-5 - D - 02 - H - - - - - - LF

Pins Per Row
01 - 40

Row Specification
D = Dual Row

Pin Options		
Tail Length		
.090	2.29mm	02
.120	3.05mm	04

Plating Options	
- 30µ Gold on Contact Area / Matte Tin on Tail	H
- 10µ Gold on Contact Area / Matte Tin on Tail	GT
- Gold Flash over Entire Pin	F

Lead Free

Polarized Position
Leave blank if not needed
If required, specify empty pin position, e.g. 01

Side Ears "SE" Option
Leave blank if not needed
SE = With

Alignment Pin "AP" Option
Leave blank if not needed
AP = With

Locking Clip "C" Option
Leave blank if not needed
C = With

Specifications

Current Rating: 1.0 Ampere

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300V AC

Contact Resistance: 20 mΩ Max.

Operating Temperature: -40°C to + 105°C


Max. Process Temperature:

- Peak: 260°C up to 10 secs.
- Process: 230°C up to 60 secs.
- Wave: 260°C up to 6 secs.
- Manual Solder: 350°C up to 5 secs.

Materials

Contact Material: Phosphor Bronze

Insulator Material: Nylon 6T



Mates with:
PTSHS,
PTSHSM

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice

PSSHS-5-D SERIES

.050x.050 cl Dual Row - Thru Hole
Polarized Socket

08 FEB 07

Scale
NTS

UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES (MM)
TOLERANCES ARE:

ONE PLACE DECIMALS ±.100
TWO PLACE DECIMALS ±.010
THREE PLACE DECIMALS ±.005
FOUR PLACE DECIMALS ±.0020

ANGLES
±.5°



4235 Earnings Way, New Albany, Indiana, 47150, USA
1-800-782-3486 (USA/Canada/Mexico)
Tel: 812-944-7244
Fax: 812-944-7268
E-mail: mle@mlelectronics.com
Web: www.mlelectronics.com

Revision
B

Sheet
1/2

Revisions

Revision B - (20th Mar 2008)

Amendment to 'Locking Clip' option in ordering grid.

Option amended to a single letter from 'LC = with' to 'C = with'.

PSSHS-5-D SERIES

.050x.050 cl Dual Row - Thru Hole
Polarized Socket

08 FEB 07

Scale
NTS

UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES (MM)
TOLERANCES ARE:

ONE PLACE DECIMALS ±.100
TWO PLACE DECIMALS ±.010
THREE PLACE DECIMALS ±.005
FOUR PLACE DECIMALS ±.0020

ANGLES
±3°



4235 Earnings Way, New Albany, Indiana, 47150, USA
1-800-782-3486 (USA/Canada/Mexico)

Tel: 812-944-7244
Fax: 812-944-7268
E-mail: mle@mlelectronics.com
Web: www.mlelectronics.com

Revision
B

Sheet
2/2