

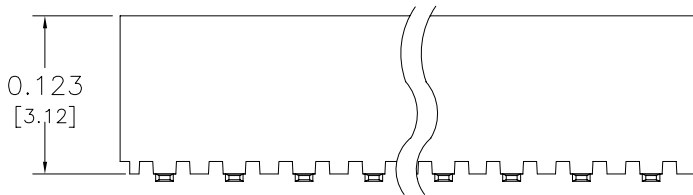
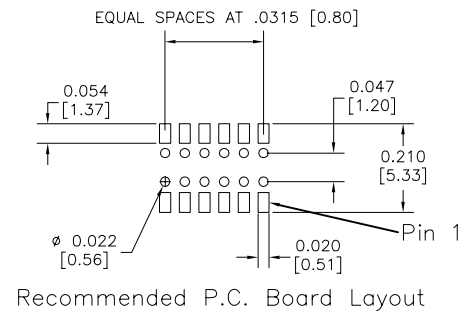


Major League Electronics .0315 cl Socket Strip - Surface Mount - Vertical

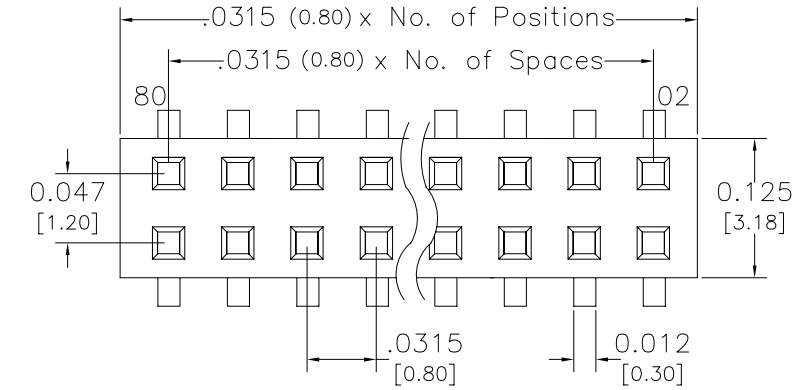

Tails may be clipped to achieve desired pin length

Ordering Information

SMSS-8 [XX] - D - 06 - [XX] - [XXX] - [XX] - [X] - LF

Pins Per Row [XX]
01 - 40
Row Specification D = Dual Row
Surface Mount

Lead Free

Packing Information

TR-P = Tape and Reel with Plastic Pick and Place pad
TB-P = Tube with Plastic Pick and Place pad
TB-0 = Tube without Pick and Place Pad
*If left blank, packaging at MLE's discretion
Pad may be metal, mylar or plastic*


Polarized Position

Leave blank if not needed
If required, specify empty pin position, e.g. 012 for Pin 12

Plating Options	
- 10µ Gold on Contact Area / Matte Tin on Tail	GT

Specifications

Current Rating: 1.0 Ampere
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 30 mΩ Max.
Operating Temperature: -40°C to + 105°C
Max. Process Temperature:
Peak: 260°C up to 10 secs.
Process: 230°C up to 60 secs.
Wave: 260°C up to 6 secs.
Reflow: 260°C up to 10 secs.
Manual Solder: 350°C up to 5 secs.



Materials

Contact Material: Phosphor Bronze
Insulator Material: Nylon 6T

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice

SMSS-8-D-06 SERIES

.0315 cl Dual Row - Surface Mount
Socket Strip - Vertical - Dual Entry

12 FEB 07

Scale
NTS

UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES (MM)
TOLERANCES ARE:

ONE PLACE DECIMALS ±.100
TWO PLACE DECIMALS ±.010
THREE PLACE DECIMALS ±.005
FOUR PLACE DECIMALS ±.0020
ANGLES
±5°



4235 Earnings Way, New Albany, Indiana, 47150, USA
1-800-782-3486 (USA/Canada/Mexico)
Tel: 812-944-7244
Fax: 812-944-7268
E-mail: mle@mlelectronics.com
Web: www.mlelectronics.com

Revision
B

Sheet
1/2

Revisions

Revision B - (20th Mar 2008)

Amendment to packing options in ordering grid:

Revision A

TR-P = Tape and Reel with Plastic Pick and Place pad
TR-M = Tape and Reel with Metal Pick and Place pad
TR-K = Tape and Reel with Kapton Tape Pick and Place pad
TB-P = Tube with Plastic Pick and Place pad
TB-M = Tube with Metal Pick and Place pad
TB-K = Tube with Kapton Tape Pick and Place pad
TB-0 = Tube without Pick and Place Pad
BK-0 = Bulk without Pick and Place Pad

Revision B

TR-P = Tape and Reel with Plastic Pick and Place pad
TB-P = Tube with Plastic Pick and Place pad
TB-0 = Tube without Pick and Place Pad
*If left blank, packaging at MLE's discretion
Pad may be metal, mylar or plastic*

SMSS-8-D-06 SERIES

.0315 cl Dual Row - Surface Mount
Socket Strip - Vertical - Dual Entry

12 FEB 07

Scale
NTS

UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES (MM)
TOLERANCES ARE:

ONE PLACE DECIMALS ±.100
TWO PLACE DECIMALS ±.010
THREE PLACE DECIMALS ±.005
FOUR PLACE DECIMALS ±.0020

ANGLES
±3°



4235 Earnings Way, New Albany, Indiana, 47150, USA
1-800-782-3486 (USA/Canada/Mexico)
Tel: 812-944-7244
Fax: 812-944-7268
E-mail: mle@mlelectronics.com
Web: www.mlelectronics.com

Revision
B

Sheet
2/2