


Major League Electronics .079" cl Shrouded Terminal Strip Header

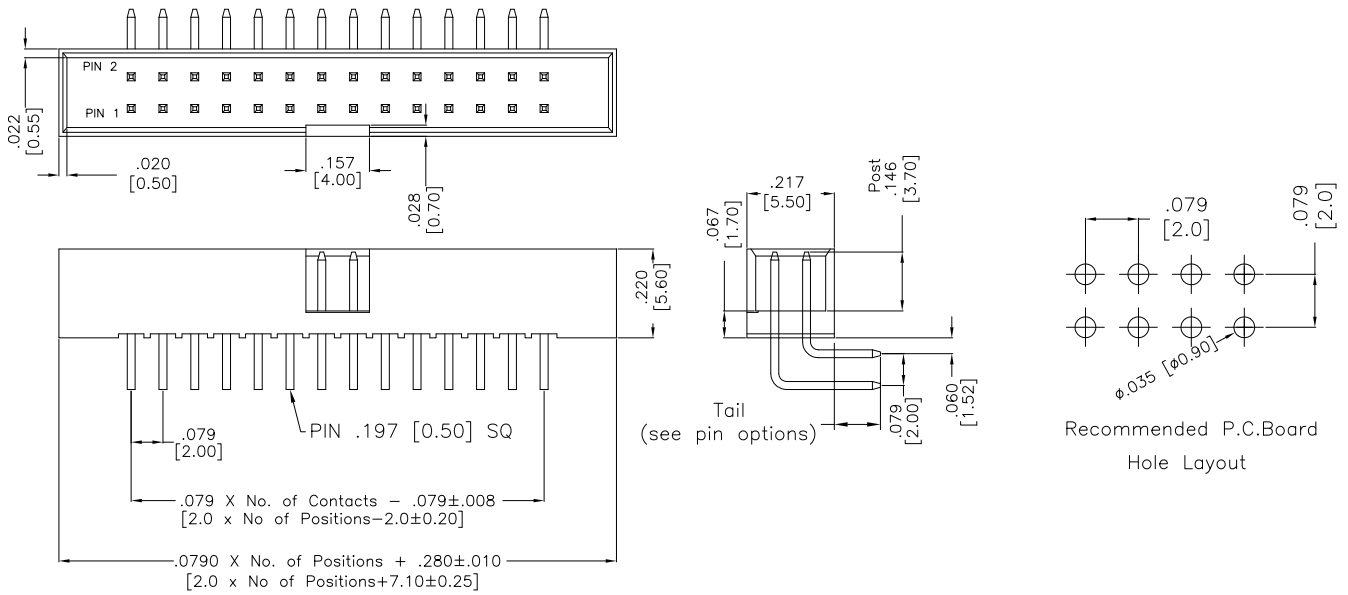

Tails may be clipped to achieve desired pin length

Ordering Information

SHTSHR-2 - - D - - A - - - - - LF

Pins Per Row
05 - 25

Double

Pin Options	
Tail Length	
2.54 (.100)	02
3.00 (.118)	04

Post Option


Plating Options	
- 10µ Gold on Contact area/Flash on Tail	G
- 10µ Gold on Contact Area/Matte Tin on Tail	GT
- Matte Tin all Over	T
- Gold Flash Over Entire Pin	F

Lead Free

Polarized Position
001 - 050
Leave blank if not needed

Lock Tight "LT" (Optional)
LT = With
Leave blank if not needed

Two tails per strip are crimped in opposing directions on or near the centerline. Must have a minimum dimension of .050". Recommended hole size of .040".

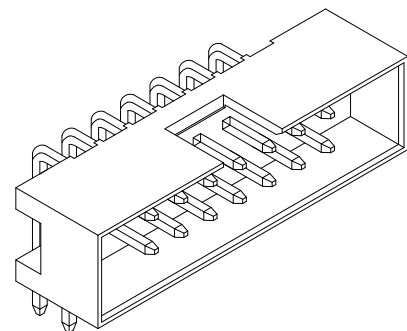

Mates with:
IDS-2

Insulator	Polyester UL 94V-0 Nylon 6T	Current Rating	1 Amp
Contact	Copper Alloy	Dielectric Withstanding	500V AC/DC
Insulation Resistance	1000 MOHMS min.	Operating Temperature	-40°C to +105°C
Contact Resistance	20 mOHMS max.		

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice

UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES (MM)

TOLERANCES ARE:
ONE PLACE DECIMALS ±0.38
TWO PLACE DECIMALS ±0.25
THREE PLACE DECIMALS ±0.13

ANGLES
NO DECIMALS ±5°
ONE PLACE DECIMALS ±2°
TWO PLACE DECIMALS ±1°
THREE PLACE DECIMALS ±0.5°

SHTSHR-2 SERIES

.079" cl Shrouded Terminal Strip Header
Right Angle

23 APR 07

Scale
NTS



4235 Earnings Way, New Albany, Indiana, 47150, USA
1-800-782-3486 (USA/Canada/Mexico)
Tel: 812-944-7244
Fax: 812-944-7268
E-mail: mle@mlelectronics.com
Web: www.mlelectronics.com

Revision
B

Sheet
1/2

Revisions

Revision B - (30th April 2010)

Amendment to Current Rating from 2 to 1 Amp

SHTSHR-2 SERIES

.079" cl Shrouded Terminal Strip Header
Right Angle

23 APR 07

Scale
NTS

UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES (MM)
TOLERANCES ARE:

ONE PLACE DECIMALS ±.100
TWO PLACE DECIMALS ±.010
THREE PLACE DECIMALS ±.005
FOUR PLACE DECIMALS ±.002



4235 Earnings Way, New Albany, Indiana, 47150, USA
1-800-782-3486 (USA/Canada/Mexico)

Tel: 812-944-7244
Fax: 812-944-7268

E-mail: mle@mlelectronics.com
Web: www.mlelectronics.com

Revision
B

Sheet
2/2