



Major League Electronics .079" cl Latching Shrouded Header

ACCESSORIES	X	Y
LONG LATCH	0.775 [19.7]	0.453 [11.5]
SHORT LATCH	0.665 [16.9]	0.342 [8.7]

PINS PER ROW	A	B	C
5	1.012 [25.7]	0.315 [8.0]	0.622 [15.8]
6	1.090 [27.7]	0.394 [10.0]	0.701 [17.8]
7	1.169 [29.7]	0.472 [12.0]	0.779 [19.8]
8	1.248 [31.7]	0.551 [14.0]	0.858 [21.8]
10	1.405 [35.7]	0.709 [18.0]	1.016 [25.8]
11	1.484 [37.7]	0.787 [20.0]	1.094 [27.8]
12	1.563 [39.7]	0.866 [22.0]	1.173 [29.8]
13	1.642 [41.7]	0.945 [24.0]	1.252 [31.8]
15	1.799 [45.7]	1.102 [28.0]	1.409 [35.8]
17	1.957 [49.7]	1.260 [32.0]	1.567 [39.8]
20	2.193 [55.7]	1.496 [38.0]	1.803 [45.8]
22	2.350 [59.7]	1.653 [42.0]	1.961 [49.8]
25	2.587 [65.7]	1.890 [48.0]	2.197 [55.8]
34	3.295 [83.7]	2.598 [66.0]	2.905 [73.8]

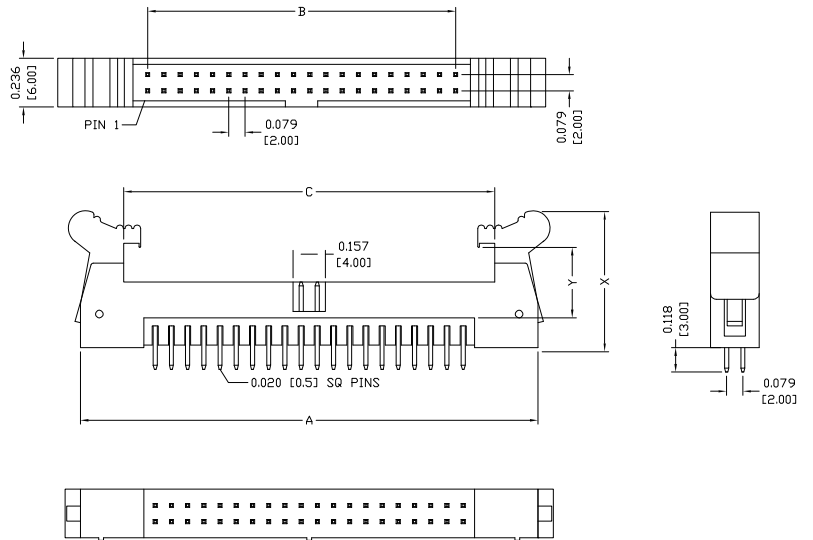

RECOMMENDED PCB LAYOUT

Tails may be clipped to achieve desired pin length

Ordering Information

SHTSL-2 - - 02 - - - - LF

Pins Per Row
05, 06, 07, 08, 10, 11, 12, 13, 15, 17
20, 22, 25, 34

Double

Style
02 = Black


Lead Free

Polarized Position
001 - 068
Leave blank if not needed

Ejector Latch
LL = Long
SL = Short

Plating Options	
- 10µ Gold on Contact Area/Matte Tin on Tail	GT
- 3µ Selective Gold	FT
- 30µ Gold on Contact Area/Matte Tin on Tail	H
- Matte Tin all Over	T
- Gold Flash Over Entire Pin	F

Standard plating = FT



Mates with:
IDS-2

Insulator	PBT, glass reinforced, rated UL 94V-0	Current Rating	1 Amp
Contact	Brass	Dielectric Withstanding	500V AC for one minute
Insulation Resistance	3000 MOHMS min.	Operating Temperature	-40°C to +105°C
Contact Resistance	30 mOHMSmax.	Terminated with	0.039" [1.0mm] pitch cable assembly

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice

SHTSL-2 SERIES

.079" cl Latching Shrouded Header - Straight

23 APR 07

Scale
NTS

UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES (MM)
TOLERANCES ARE:

ONE PLACE DECIMALS ±.100
TWO PLACE DECIMALS ±.010
THREE PLACE DECIMALS ±.005
FOUR PLACE DECIMALS ±.002



4235 Earnings Way, New Albany, Indiana, 47150, USA
1-800-782-3486 (USA/Canada/Mexico)
Tel: 812-944-7244
Fax: 812-944-7268
E-mail: mle@mlelectronics.com
Web: www.mlelectronics.com

Edition
1

Sheet
1/1