


Major League Electronics 6 Pin Surface Mount SIM Connector

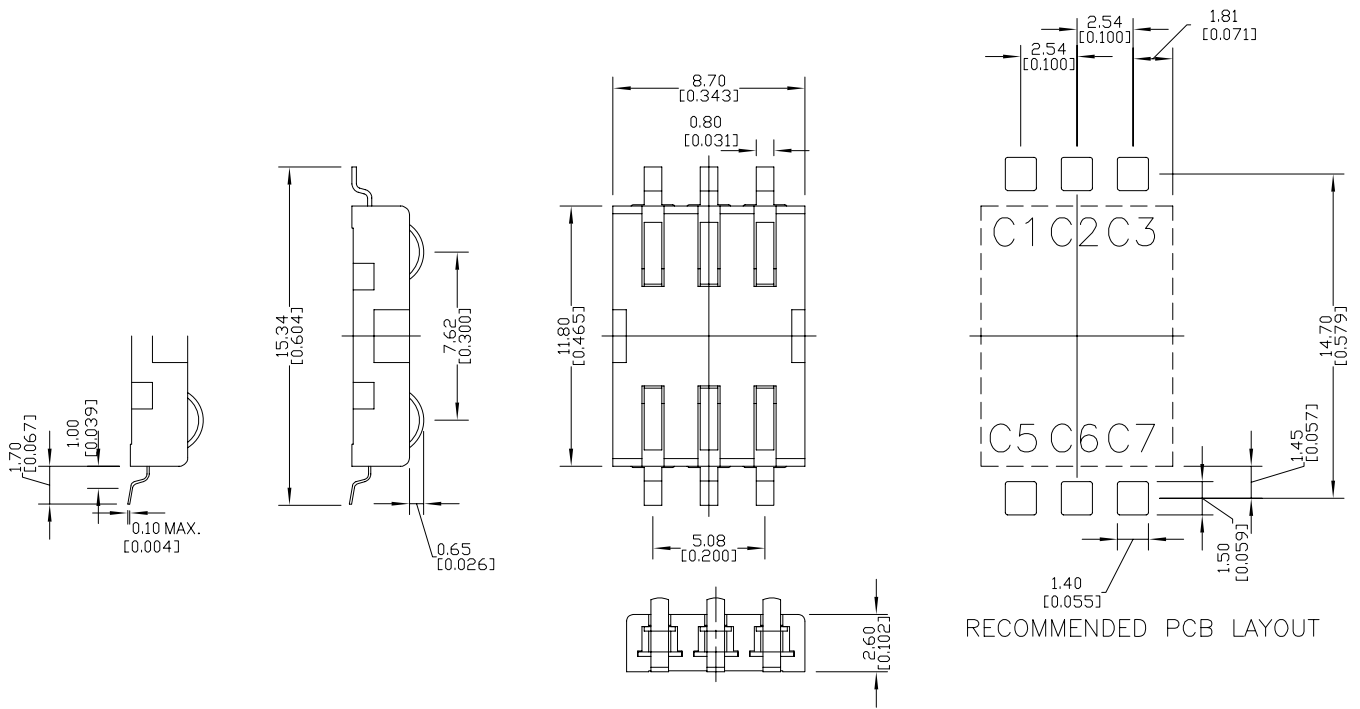

Ordering Information

SIMS22 6 - 26 - 1 - 2 - X - LF

Number of Contacts
6


Height	26
(0.465L x 0.343W x 0.102H inches) (11.80L x 8.70W x 2.60H mm)	

Switch
1 = Without Switch

Lead Free

Packing Information
B = Tray
F = Reel

Locating Peg
2 = Without Locating Peg

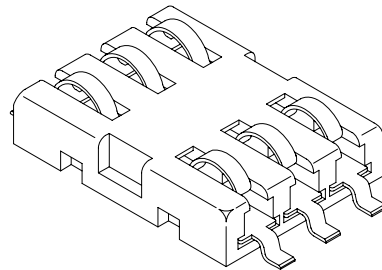

Weight:	Approx. 0.40g	Insulation Resistance:	> 1000 MOhms/ 500 VDC	Operating Humidity:	10% ~ 95% RH
Contact Principle:	Friction technology	Wave:	Not applicable	Storage Temperature:	-40°C, ~ +85°C
Operating Position:	Shaft up / Down / Horizontal	VaporPhase:	215°C, 30 sec. Max.	Storage Humidity:	10% ~ 95% RH
Durability:	100,000 cycles min.	IR Reflow:	230°C, 15 sec. Max.	Thermal Shock:	-40°C, ~ +85°C, 5 cycles
Insulation material:	Thermoplastic, UL 94V-0	Manual Soldering:	360°C, 3 sec. Max.	Damp Heat:	40°C, 90% RH, 500HR
Contact Resistance:	50 mOhmstypical / 100 mOhmsmax.	Operating Temperature:	-40°C, ~ +85°C	Salt-Mist:	35°C, 5% NaCl, 48HR

SIMS22 SERIES

6 Pin Surface Mount SIM Connector

19 APR 07

Scale
NTS



4235 Earnings Way, New Albany, Indiana, 47150, USA
1-800-782-3486 (USA/Canada/Mexico)
Tel: 812-944-7244
Fax: 812-944-7268
E-mail: mle@mlelectronics.com
Web: www.mlelectronics.com

Edition
1

Sheet
1/1