


Major League Electronics .100 cl Screwless Terminal Blocks

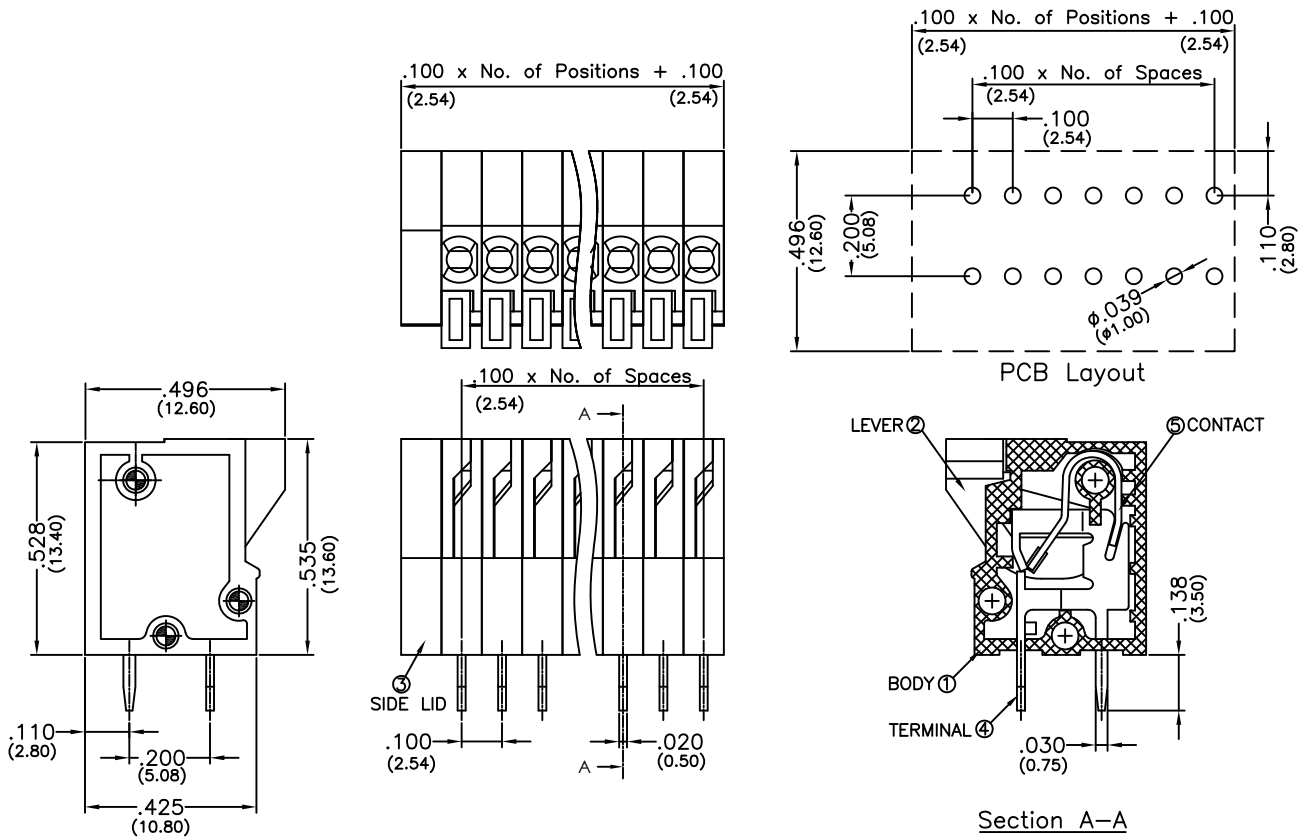

Ordering Information

TBS-01-100-XX-XX-LF

Pitch

100 = .100 (2.54) cl

No. of Positions

02 - 12

Color

GR = Green (Standard)

BK = Black

BL = Blue

WH = White

GY = Grey

OR = Orange

YW = Yellow

RD = Red

BR = Brown


Lead Free

Specifications

Current Rating: 2 Ampere
 Voltage Rating: AC 150V
 Wire Range: 20-26 AWG
 Dielectric Withstanding Voltage: AC 2000V/1 minute
 Insulation Resistance: DC 500V 500MΩ
 Operating Temperature: -33°C to + 105°C
 Strip Length: .354-.394 (9-10mm)

Materials

1. Body: PA66 (Nylon), UL94 V-0
2. Lever: PA66 (Nylon), UL94 V-0
3. Side Lid: PA66 (Nylon), UL94 V-0
4. Terminal: H65 Brass, Tin Plated
5. Contact: SUS301 Stainless Steel



Parts are subject to change without notice

TBS-01-100-XX-XX-LF

.100cl Screwless Terminal Block
Interlock

20 NOV 08

Scale
NTS

UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES (MM)
TOLERANCES IN INCHES:

ONE DECIMAL PLACE ±0.30
 TWO DECIMAL PLACE ±0.20
 THREE DECIMAL PLACE ±0.15
 FOUR DECIMAL PLACE ±0.10



4235 Earnings Way, New Albany, Indiana, 47150, USA
 1-800-782-3486 (USA/Canada/Mexico)
 Tel: 812-944-7244
 Fax: 812-944-7268
 E-mail: mle@mlelectronics.com
 Web: www.mlelectronics.com

Revision
C

Sheet
1/2


Revisions

Revision B - (27th Mar 2009)

Amendment to PCB hole diameter from .047 (1.20) to .039 (1.00)

Revision C - (23rd Mar 2010)

Top view added

<p>UNLESS OTHERWISE SPECIFIED DIMENSIONS IN INCHES (MM) TOLERANCES IN INCHES:</p> <p>ONE DECIMAL PLACE ±0.30 TWO DECIMAL PLACE ±0.20 THREE DECIMAL PLACE ±0.15 FOUR DECIMAL PLACE ±0.10</p>	<p>TBS-01-100-XX-XX-LF</p> 	<p>.100cl Screwless Terminal Block Interlock</p> <p>4235 Earnings Way, New Albany, Indiana, 47150, USA 1-800-782-3486 (USA/Canada/Mexico) Tel: 812-944-7244 Fax: 812-944-7268 E-mail: mle@mlelectronics.com Web: www.mlelectronics.com</p>	<p>20 NOV 08</p> <p>Scale NTS</p> <p>Revision C</p> <p>Sheet 2/2</p>
---	--	--	--